


Garland Cat6 RJ45 Transparent Plug

General purpose Cat6 RJ45 (8P8C) clear plug with with gold plated contacts.

General purpose Cat6 RJ45 (8P8C) plug with insert for termination onto stranded and solid conductors. Clear polycarbonate housing with gold plated contacts.

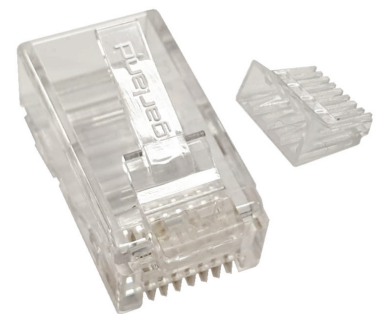

Applicable Standards

- ISO/IEC 11801-1:2017 & 11801-2:2017
- EN 50173-1:2018 & EN 50172-2:2018
- TIA/EIA 568.2D:2018
- IEC 61935-2:2010
- IEC 60512-99-001:2012

Applications

Used for terminating solid or stranded Cat6 cabling in Structured cabling, computer networks and security systems.

| Part Number | MTP63U | | |
|-----------------------|-------------------|-------------------------------|-------------------|
| Contact Blades | Main Material | Copper Alloy | |
| | Prongs | 3 Per Blade | |
| | Gold Plating | 50µm | |
| Body | Poly Carbonate | -Colour | Clear/Transparent |
| Conductor Suitability | Conductor Size | 23 AWG to 26 AWG | |
| | Conductor Type | Solid or Stranded (7 Strands) | |
| Mechanical Properties | Temperature range | Storage | -20°C to +35°C |
| | | Operating | -20°C to +50°C |
| | Durability | 750 Mating Cycles | |

| Part Number | Qty Per Pack | Pack Type | Carton Size |
|-------------|--------------|------------------|---------------------|
| MT6P3U-50 | 50 | Ziplock Poly Bag | 51.6 x 36.2 x 32 cm |
| MT6P3U-100j | 100 | Jar | 36 x 36 x 29 cm |

210922